



PRODUCTS LIMITED

ALL-PLASTIC CLOSURES
FOR INDUSTRIAL PACKAGING



THE EVOLUTION OF PERFORMANCE

APC-2 PLASTIC PAIL CLOSURES

- Fits most standard 2.56 inch (65 mm) diameter plastic cover openings
- Patented two position lock ring for fast, positive installation
- Leak resistant to 30 kPa (4.5 psi) for UN Packing Groups II and III
- Easy to lift bails, even with gloves
- Rugged design with the best low temperature performance in the industry

FOR A QUICK RESPONSE TO YOUR PLASTIC PAIL CLOSURE REQUIREMENTS PLEASE CONTACT APC SALES AT:

38 LORNE AVENUE, BRAMPTON, ONTARIO, CANADA L6X 1L1


TEL: (905) 457-0887 FAX: (905) 459-3983 EMAIL: apc@pailclosures.com www.pailclosures.com



Patented two position lock ring for fast, positive installation.

- 1 - Installation press first forces cover rim into channel
- 2 - Lock ring is then pushed into locking position

Heavy duty cap balls are easy to lift, even with gloves.
Flexible body resin allows spout to extend at -40°C.

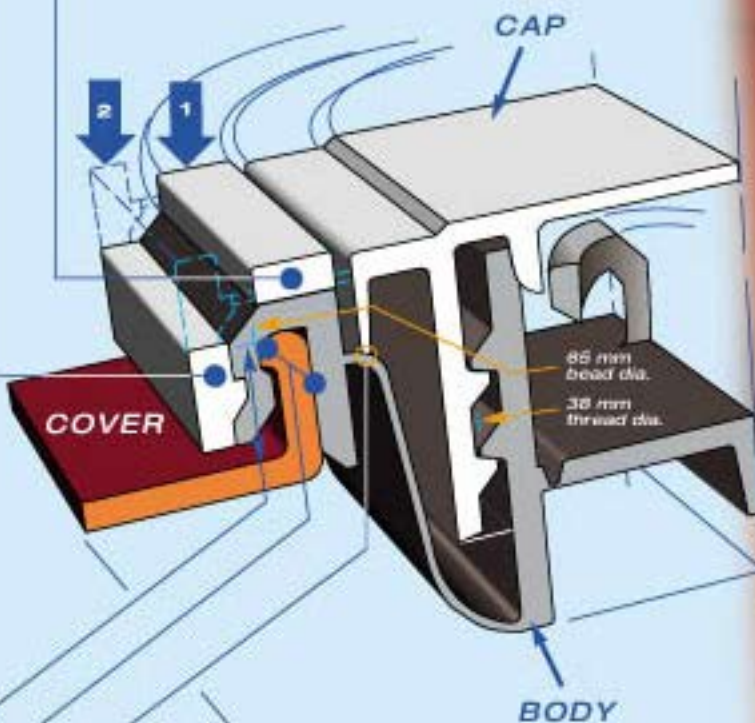


Cap seal keeps outer sump clean and dry. Stops water entry and ice blockage.

Body channel is molded to fit the bead tightly. Provides for a seal up to 30 kPa for UN Packing Groups II and III subject to performance and compatibility testing. The plastic lock ring secures the closure in position.

APC-2 closures have two sizes to optimize fit and performance on various cover bead heights:

- APC-25 for 5 mm minimum bead height
- APC-27 for 7 mm minimum bead height

APC-2 closures are molded from FDA approved polyethylene resins. All plastic closures are recyclable without removing metal crimp rings.

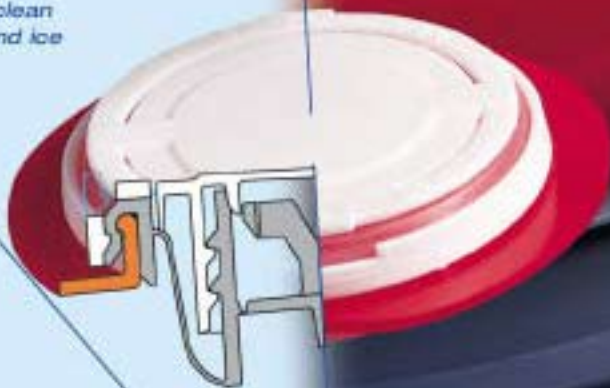

PRODUCTS LIMITED

EMAIL: apc@pailclosures.com

Tel: (905) 457-0887 Fax: (905) 459-3983

APC-2 Plastic Pail Closures

Reference specification 9-2.1